


ITEM CODE: DC1700 RANGE




Features:

- Fixed power size 3, 4 or 5 and adjustable power size 1-4, 1-5, 3-6 or 2-6.
- Standard sweep and latching speed.
- UL listed. UL10C 3 hours fire rated. UL file #: GVEV.R39005
- ADA compliant (American with Disabilities Act), extracted from ICC (International Code Council) A117.1. Meets 5 lbs opening force for DC1714.
- BHMA CERTIFIED, Grade 1
- Closer body in: Cast aluminium. Closer arm in: Stamped steel. Non-handed.
- Available with or without adjustable backcheck.
- Standard in package: tri-packed for regular arm, top jamb and parallel arm application. Optional: Available with guide rail.
- Standard self-tapping and drilling screws.
- Standard finish: Silver (Aluminium- SE).
- Other finishes are available upon request.




MOUNTING STYLE FOR DC1714BC GR


<p>HINGE PULL SIDE (HINGE SIDE)</p>	
<p>TOP JAMB – PULL SIDE (HINGE SIDE)</p>	
<p>PUSH SIDE (NON-HINGE SIDE)</p>	




MOUNTING STYLES

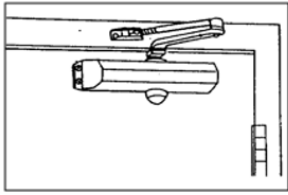

REGULAR ARM INSTALLATION
CLOSER IS INSTALLED ON
PULL/HINGE SIDE OF DOOR

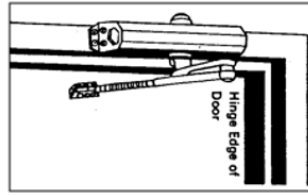


TOP JAMB INSTALLATION
CLOSER IS INSTALLED ON FRAME ON PUSH SIDE
OF DOOR

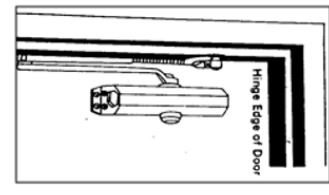

PARALLEL ARM INSTALLATION
CLOSER IS INSTALLED ON
PUSH SIDE OF DOOR

TECHNICAL DIMENSIONS

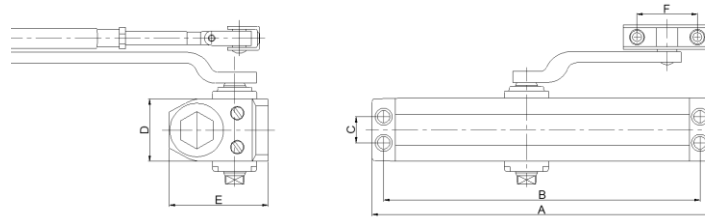


A. LENGTH OF CLOSER BODY: 248 MM	B. HORIZONTAL MOUNTING HOLES: 230 MM
C. VERTICAL MOUNTING HOLES: 19 MM	D. CLOSER BODY HEIGHT: 50 MM
E. PROJECTION FROM DOOR: 73 MM	F. ARM SHOE SPACING: 44 MM









SELECTION CHART

MODEL#	ANSI CLOSER SIZE	REMARK
DC1703	3	Tri-Packed
DC1704	4	Tri-Packed
DC1705	5	Tri-Packed
DC1714	1-4	Tri-Packed, with backcheck, ADA compliant, BHMA CERTIFIED
DC1715	1-5	Tri-Packed with Backcheck, BHMA CERTIFIED
DC1716	1-6	Tri-Packed with Backcheck
DC1736	3-6	Tri-Packed with Backcheck

CLOSER SIZE	REGULAR & TOP JAMB MINIMUM - MAXIMUM WIDTH OF DOOR(MM)		MAX. DOOR WEIGHT (KG)
	INTERIOR	EXTERIOR OR VESTIBULE DOORS	
2	609 to 863.6		36
3	863.6 to 965.5	609 to 762	45
4	965.5 to 1219.2	762 to 914.4	57
5	1219.2 to 1371.6	914.4 to 1066.8	70
6	1371.6 to 1524	1066.8 to 1219.2	82



CLOSER SIZE	PARALLEL ARM MINIMUM - MAXIMUM WIDTH OF DOOR(MM)		MAX. DOOR WEIGHT (KG)
	INTERIOR	EXTERIOR OR VESTIBULE DOORS	
3	609 to 863.6		36
4	863.6 to 965.5	609 to 762	45
5	965.5 to 1219.2	762 to 914.4	57
6	1219.2 to 1371.6	914.4 to 1066.8	70

OPTIONAL ACCESSORIES		
DESCRIPTION	PHOTO	ARTICLE #
3 ½ inches Tall Drop Plate Parallel Arm Mount		DC1700-TDP-3.5
2 9/16 inches Tall Narrow Drop Plate		DC1700-TNDP-2916
Friction Type-Hold open arm.		FTHO
Parallel Arm Bracket for FTHO		PAB
Slim Plastic Cover		SPC
Sex Nuts- 4 PCS/PACK		SN
Extended Long Rod and Shoe Length 358.8 mm Top jamb reveal: 4 inches thru 8 inches		ELRS
Parallel Arm Bracket		PABX