





ITEM CODE: 55 SERIES ELECTRIC STRIKE

Features:

- Available in a variety of configurations to accommodate several types of mechanical locks, doors and frames.
- Available strikes: handed and non-handed, short and long, with and without lipping.
- Radial latch (R.L.), Incorporates a latch which rotates on its axis, reduces the perimeter of movement. It allows for a much narrower gap between the door and the jamb.
- Current: fail secure (12VAC/DC-30Ω), fail safe (12VDC-58Ω), other current is available upon request.
- Continuously rated, standard 60 seconds.
- Holding force: 3.450 N/350 kg-f.
- Fail-secure (FSE) electric strikes, are locked when power is removed (i.e. Power is applied to unlock the door).
- Fail-safe (FSA) electric strikes, are unlocked when power is removed (i.e. Power is applied to lock the door).
- Standard adjustable latch bolt (A.L.B), an ideal assistance for adjusting adjustable latch (+1-1 mm), possible to compensate for expansion at any time by readjusting the door strike.
- Optional functions:
 - Mechanism unlocking (MU), electric strike with actuating lever in the keep for mechanical release of the keep, return it again to recover its standard function.
 - Hold open (HO), the latch bolt-controlled hold open catch in the center of the keeper holds the strike unlocked even after a contact is made until the door is opened.
- Standard finish: strike in satin stainless steel (SSS). Other finishes are available upon request.


55 FSE SERIES

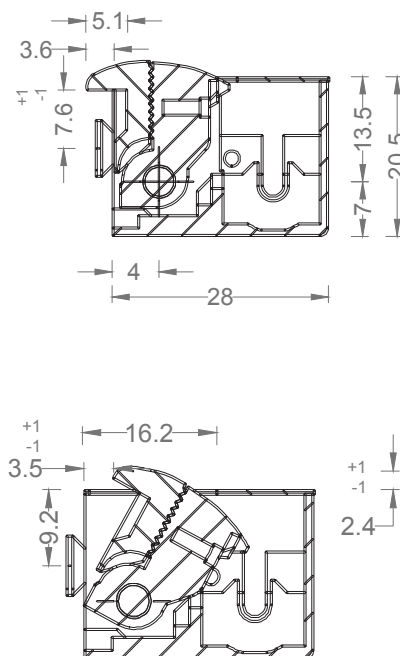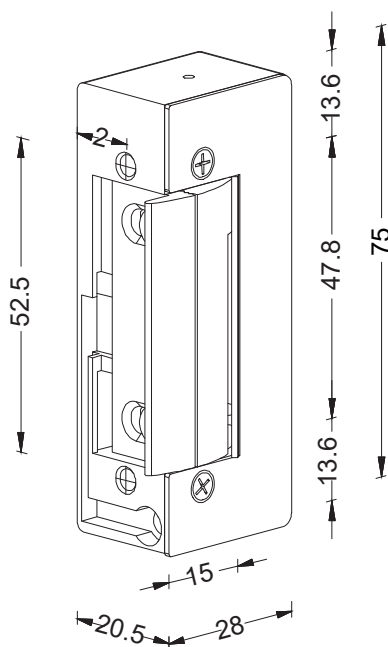


RADIAL LATCH (R.L)




ADJUSTABLE LATCH BOLT




55 STRIKE DIN RIGHT

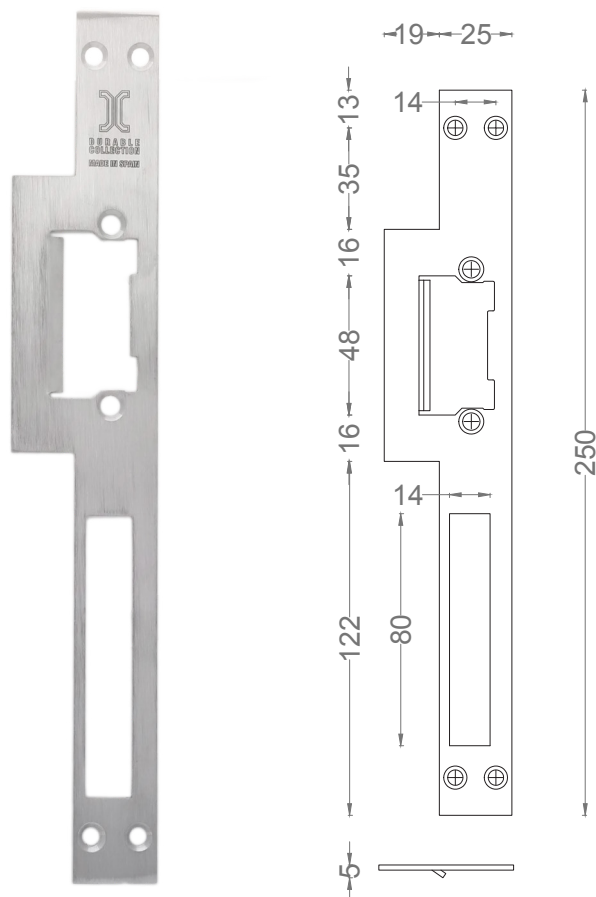


55 STRIKE DIN LEFT

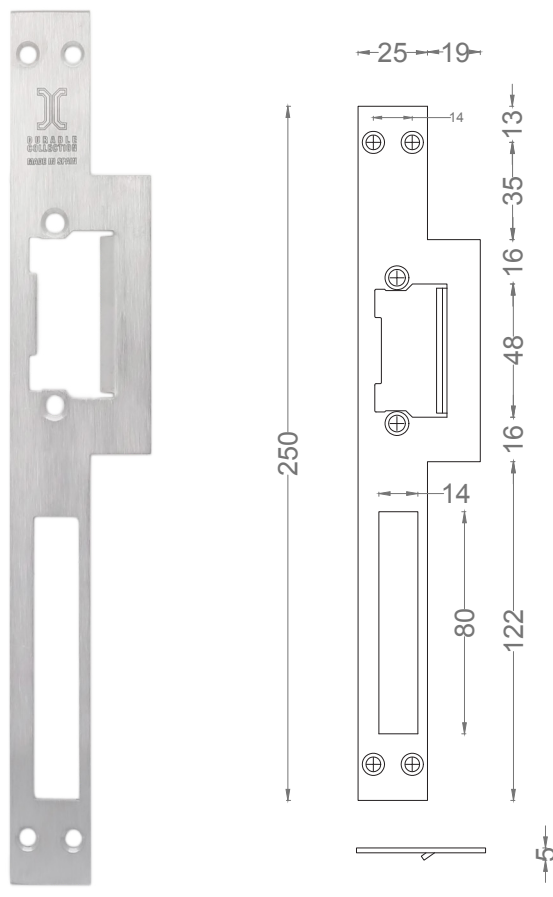


55 L. STRIKE

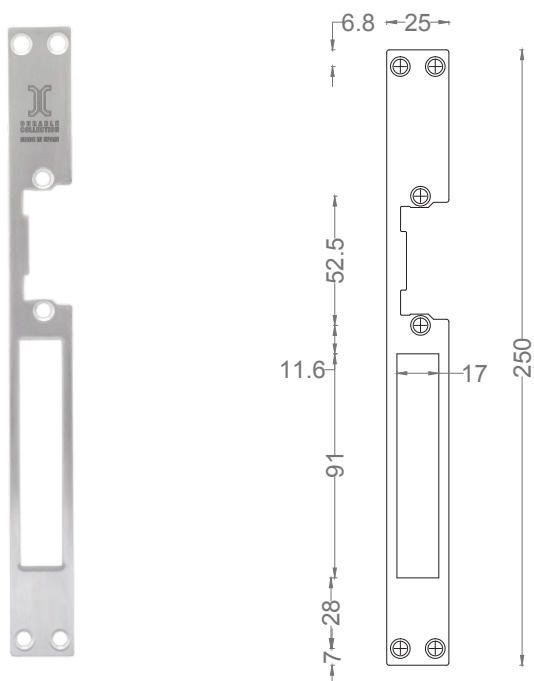


55 S. STRIKE

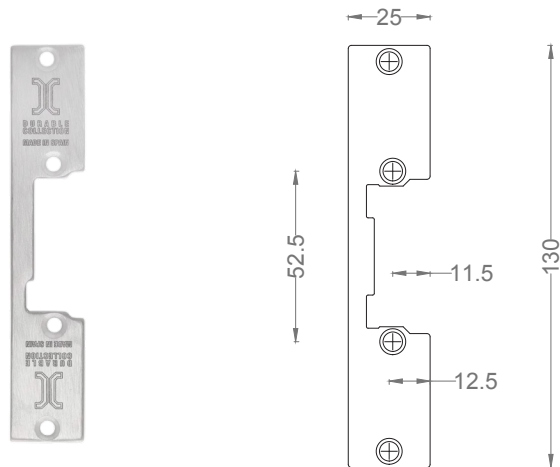

88 S. STRIKE

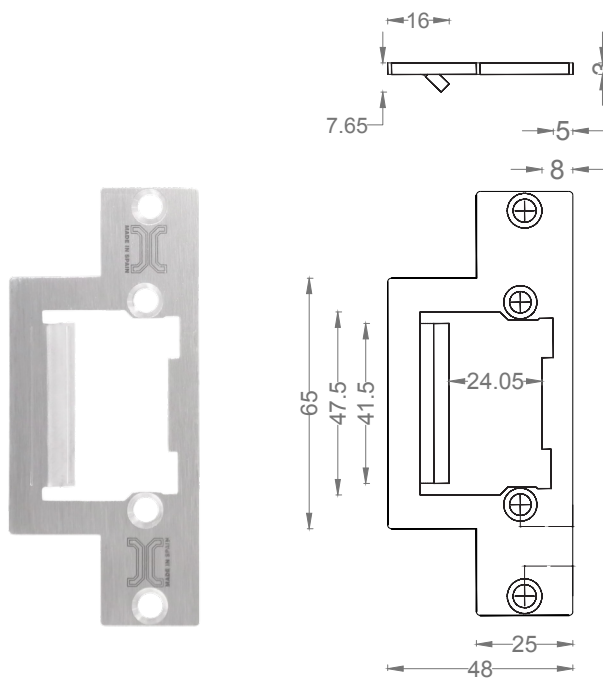

67 L. STRIKE

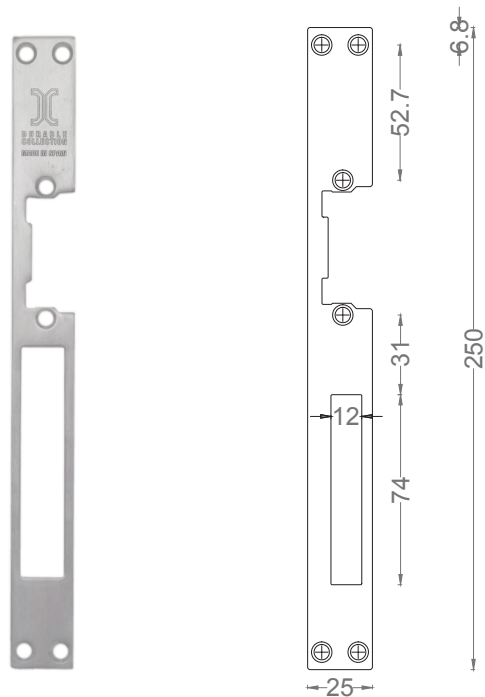



ITEM CODE: 57 SERIES ELECTRIC STRIKE

Features:

- Fail Secure Electric Strike.
- Made in Spain.
- Available strikes: Handed and non-handed, short and long, with and without lipping.
- Radial latch (R.L.).
- Current: Fail secure (12VAC/DC, 30Ω). Holding force: 3.450 N/350 kg-f.
- Built-in Time Delay Action (TDA), Allows the opening in a defined period of time (adjustable time between 11 to 30 seconds). Electric strike is automatically relocked if the door is not open or used. Ideal for push button device.
- Standard Fail-Secure (FSE) electric strikes, are locked when power is removed (i.e. power is applied to unlock the door).
- Standard Adjustable Latch bolt (A.L.B), an ideal assistance for adjusting adjustable latch (+1-1 mm), possible to compensate for expansion at any time by readjusting the door strike.
- Mechanism Unlocking (MU), electric strike with actuating lever in the keep for mechanical release of the keep, return it again to recover its standard function.
- Standard finish: Strike in satin stainless steel (SSS). Other finishes are available upon request.
- Suitable strike plates:

MODELS	55 S. PLATE	57 L. PLATE	88 S.STRIKE
57 FSE 12VAC/DC	YES	YES	YES


57 FSE SERIES

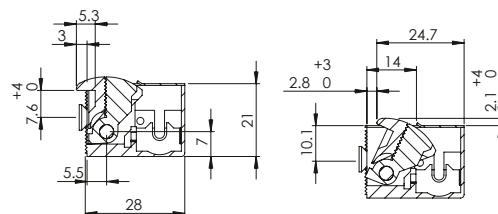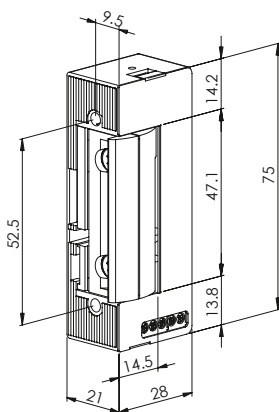


RADIAL LATCH (R.L)




ADJUSTABLE LATCH BOLT





57 L. STRIKE

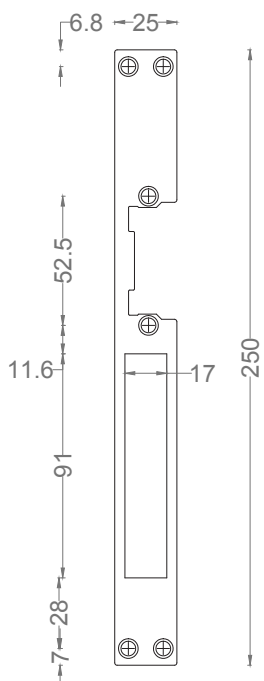

55 S. STRIKE

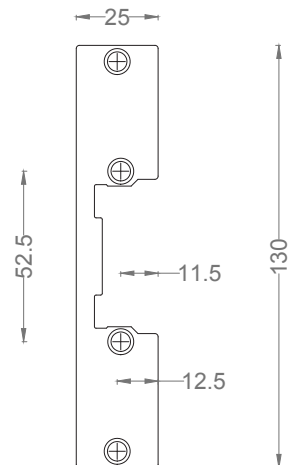

88 S. STRIKE

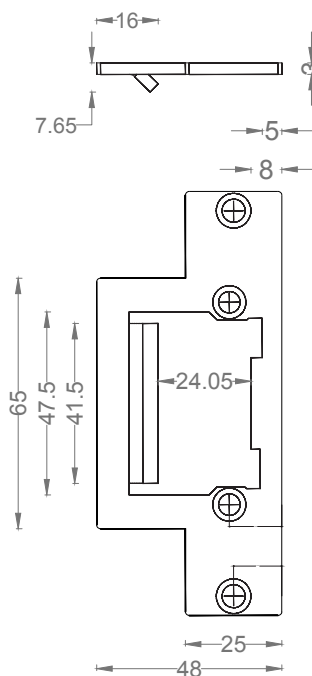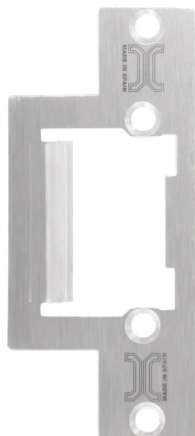


ITEM CODE: 67 SERIES ELECTRIC STRIKE


Features:

- Fail secure electric strike.
- Made in Spain.
- Available in a variety of configurations to accomodate several types of mechanical locks, doors and frames.
- Available strikes: Handed and non-handed, short and long, with and without lipping.
- Non Radial latch (R.L.).
- Current: Fail secure (12VAC/DC-17 or 30Ω), Other current is available upon request.
- Holding force: 3.450 N/350 kg-f.
- Standard Fail-Secure (FSE) electric strikes, are locked when power is removed (i.e. power is applied to unlock the door).
- Standard Adjustable Latch bolt (A.L.B), an ideal assistance for adjusting adjustable latch (+1-1 mm), possible to compensate for expansion at any time by readjusting the door strike.
- Optional functions:
 - Mechanism Unlocking (MU), electric strike with actuating lever in the keep for mechanical release of the keep, return it again to recover its standard function.
 - Hold Open (HO), the latch bolt-controlled hold open catch in the center of the keeper holds the strike unlocked even after a contact is made until the door is opened.
 - Monitor, suitable for interlocked doors.
- Standard finish: Strike in satin stainless steel (SSS). Other finishes are available upon request.
- Suitable strike plates:


MODELS	55 S. PLATE	55 L. PLATE	67 L. PLATE	88 S.STRIKE
67 FSE 8-12VAC/DC 17 OHMS	YES	NO	NO	YES
67 FSE 8-12 VAC/DC W/O H.O. 30 OHMS	YES	NO	NO	YES
67 FSE 8-12 VAC/DC MONITOR 30 OHMS	YES	NO	COME WITH	NO

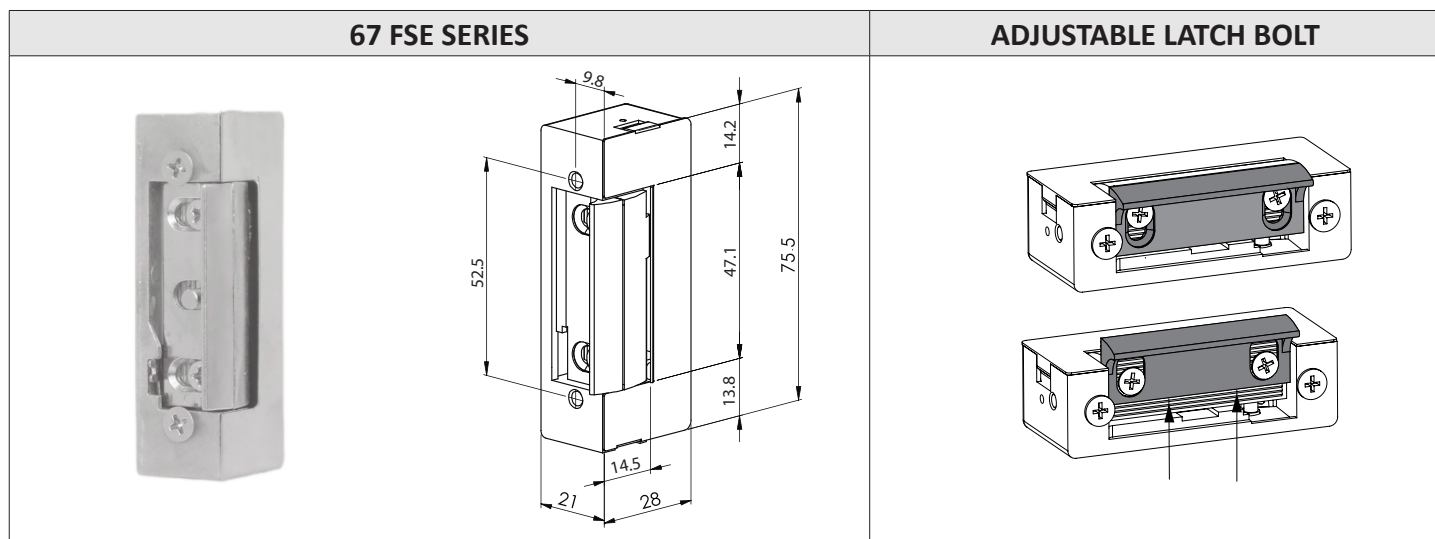


55 L. STRIKE

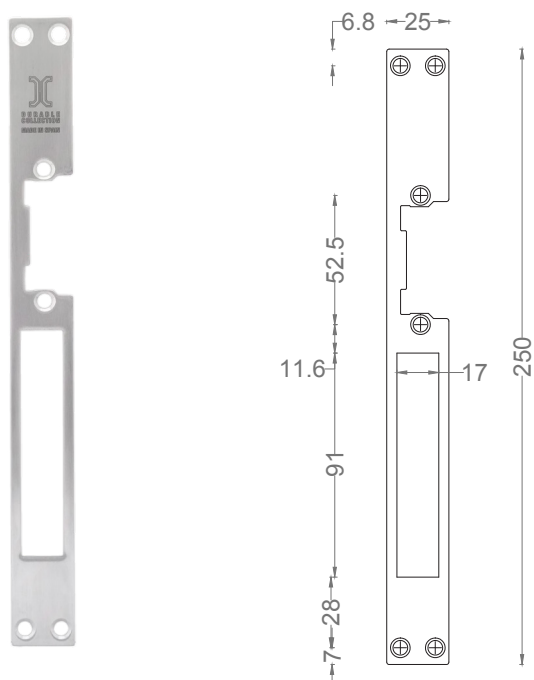


55 S. STRIKE

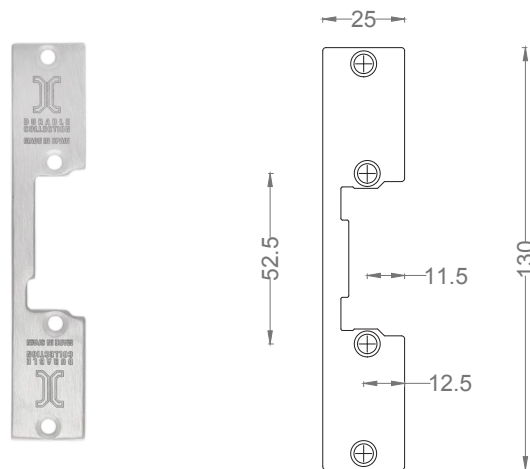

88 S. STRIKE

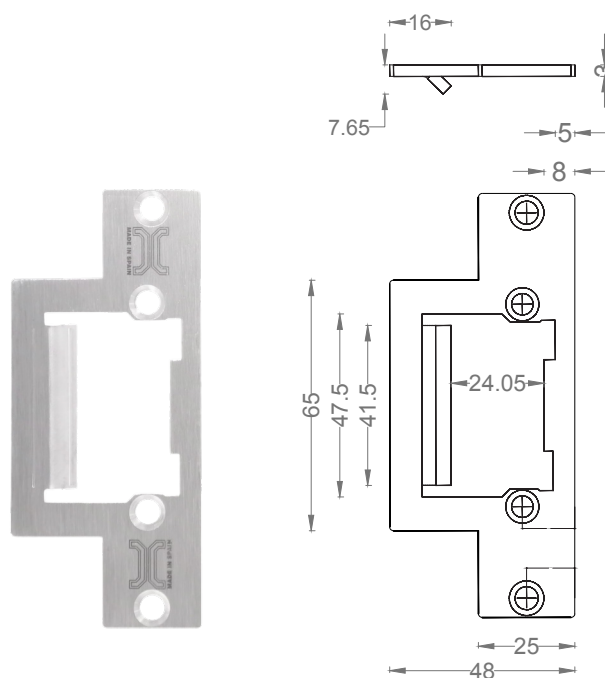

67 L. STRIKE





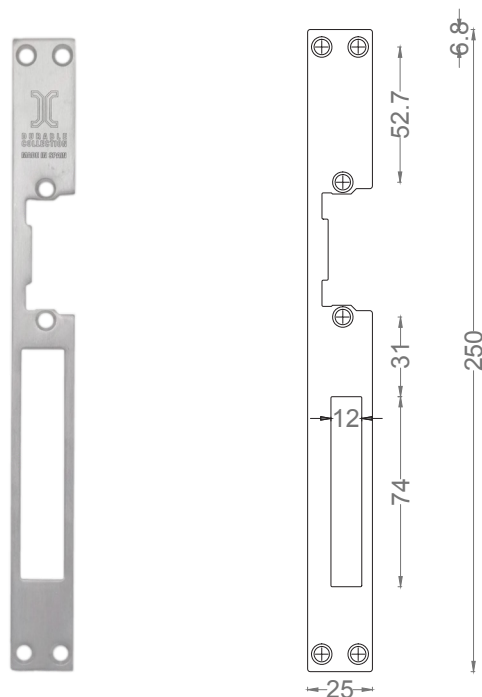


ITEM CODE: 88 FSE ELECTRIC STRIKE

Features:



- Fail Secure Electric Strike.
- Made in Spain.
- Fire rated to EN 1634-1
- Suitable strike plate: 88 S.Strike. Optional strike plate for panic bar.
- Radial latch (R.L.), Adjustable Latch Bolt.
- Current: Fail secure (12VAC/DC, 17Ω). Break resistance 900 kgs.
- Standard Fail-Secure (FSE) electric strike, are locked when power is removed (i.e. power is applied to unlock the door).
- Standard Adjustable Latch bolt (A.L.B), an ideal assistance for adjusting adjustable latch (+1-1 mm), possible to compensate for expansion at any time by readjusting the door strike.
- Standard finish: Strike plate in satin stainless steel (SSS). Other finishes are available upon request.

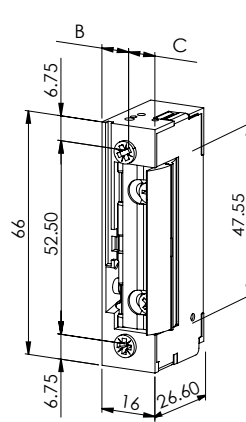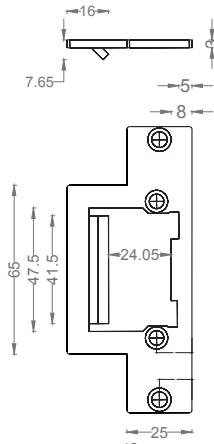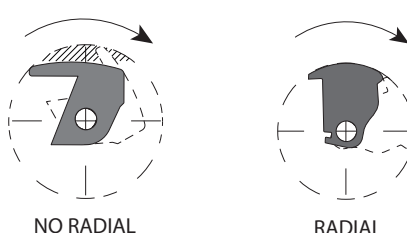88 FSE 12VAC/DC 17Ω – DIMENSIONS (STANDARD C=8.85MM)	ADJUSTABLE LATCH BOLT															
 <table><tr><td colspan="3">Fixing position version</td></tr><tr><td>measure</td><td>1</td><td>2</td></tr><tr><td>A</td><td>6.55⁺³₋₀ mm</td><td>7.35⁺³₋₀ mm</td></tr><tr><td>B</td><td>8.05 mm</td><td>7.15 mm</td></tr><tr><td>C</td><td>7.95 mm</td><td>8.85 mm</td></tr></table> 	Fixing position version			measure	1	2	A	6.55 ⁺³ ₋₀ mm	7.35 ⁺³ ₋₀ mm	B	8.05 mm	7.15 mm	C	7.95 mm	8.85 mm	
Fixing position version																
measure	1	2														
A	6.55 ⁺³ ₋₀ mm	7.35 ⁺³ ₋₀ mm														
B	8.05 mm	7.15 mm														
C	7.95 mm	8.85 mm														
88 S. STRIKE	RADIAL LATCH (R.L)															
 	 NO RADIALRADIAL															