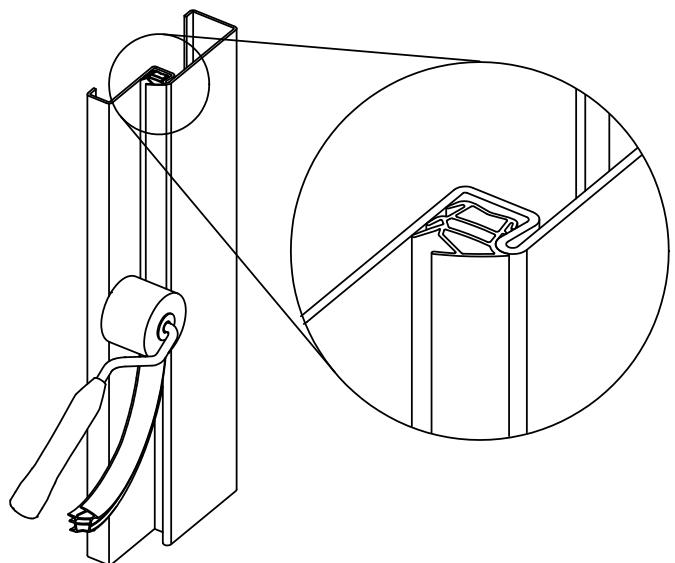
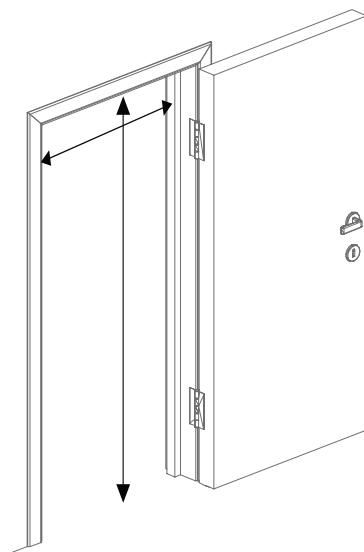

TOOLS REQUIRED

Pencil or marker
 Measuring tape
 Utility cutter


INSTRUCTIONS

- Fit the seal with the door fully open. Measure the height and width of the door frame and cut the seal to the required length.
- Position the gasket in the groove at the top corner of the frame, ensuring correct alignment, and press the gasket into the groove from top to bottom. Using a roller will provide the most even and neat results. Ensure that the gasket is not stretched during installation.
- Repeat this process on the opposite side and along the top of the frame. Close the door and check that the seal is uniform around the entire perimeter.
- Optionally, reduced closing gaps can be achieved by pressing the seal further into the groove. This requires a groove depth greater than 10 mm.

NOTES

- Ensure the groove into which the gasket is fitted is clean, dry, and free of dust.
- Do not stretch the product during installation.
- Ensure that fitting the perimeter seal does not obstruct the operation of the door. It is recommended to regularly check that the door opens and closes smoothly without friction.
- Closing forces can be reduced by pressing the gasket deeper into the groove. This is only possible if the groove is sufficiently deep and the gasket is not already resting on the groove base.